


THE WISHING WELL

Relive the fun of throwing a coin in a wishing well. This cedar-topped wishing well will be a great addition to your backyard collection. It has an antiqued appearance with the durability of concrete and cedar.

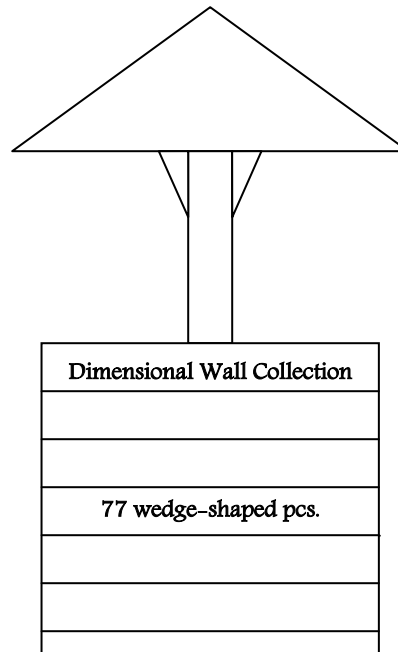

<u>Materials List</u>
77 wedge-shaped blocks
1 prefabricated cedar top with steel base
2 small tubes adhesive

Assembly

Find a relatively level location for the wishing well.

Dig a circular hole 40" in diameter and 6" deep.

Fill the hole with 4" of gravel (ask your local supplier for "Granular A"), level it and compact it.

Place the steel base centred in the hole. This will also be your circle guide.

Each layer of block contains 11 pcs.

Begin laying the stone around the steel base and make sure they fit tight.

The next row up, place the first stone half-way across the lower stone to give a staggered appearance.

Between each layer of stone apply some adhesive. Repeat each layer until complete – 7 layers.

After 4 rows have been set, place the cedar top in the base and fasten with the screws provided.

Continue placing the blocks. Once complete, fill the well with gravel approx 12" and gently tamp.

*Keep an eye out for new and exciting products and kits from
Brown's Concrete Products Limited.*